DFR210R3WD32M

Produktnummer: 1810371

DFR210R3WD32M


Drill Fix DFR Bodies. Whistle Notch Shank. 3xD.
• Drill Fix DFR with rectangular-shaped inserts offer highest stability and feed rates at smaller sizes.
• X-offset design to adjust diameter size on turning machines and optimize tolerances on machining centers.
• Drill shipped with insert screws and Torx wrench.

Se vedlagt fil for spesifikasjoner eller klikk her for å lese mer på leverandørens side >>

KennametalSpesifikasjoner

[D] Shank Diameter	32.0000
ISO Catalog Number	DFR210R3WD32M
[D1MAX] Drill Dia Max Metric	22
[L1] Gage Length	95.55
Gage Ins 1 First Dia Outside	DFR0403..
[D] Adapter Shank Bore Dia	32
[D1] Drill Diameter Min	21
[L4] Max. Drill Depth	63
[L5] Drill Point Length	0.75
[LS] Shank Length	58
Vekt	0.546 kg
Bredde/tykkelse	0 mm
Høyde	0 mm
Volum	0.1 liter
Dimensjon	0
Nøkkelvidde	0 mm
kW	0
Innvendig diameter	0 mm
Utvendig diameter	0 mm

Type	KROPP
Type 4	0
Delelengde	0 mm
Type 3	0
Bredde ytre ring	0 mm
Bredde indre ring	0 mm
Type 2	0
Type 5	0
Bordiameter	21 mm
Bortype	DFR
Borelengde	3XD
Diameter	0 mm
Neseradius	0 mm
Lengde	0 mm

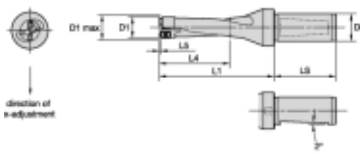

Les mer om produktet her:
https://www.ail.no/product?number=1810371

Utskriftsdato: 25.11.2026