

DFR185R3WD25M

Produktnummer: 2498751

DFR185R3WD25M

Drill Fix DFR Bodies. Whistle Notch Shank. 3xD.

- Drill Fix DFR with rectangular-shaped inserts offer highest stability and feed rates at smaller sizes.
- X-offset design to adjust diameter size on turning machines and optimize tolerances on machining centers.
- Drill shipped with insert screws and Torx wrench.


Se vedlagt fil for spesifikasjoner eller [klikk her for å lese mer på leverandørens side >>](#)



Spesifikasjoner Kennametal

Vekt	0.32 kg
Bredde/tykkelse	0 mm
Høyde	0 mm
Volum	0.05 liter
Dimensjon	0
Nøkkelvidde	0 mm
kW	0
Innvendig diameter	0 mm
Utvendig diameter	0 mm
Type	KROPP
Type 4	0
Delelengde	0 mm
Type 3	0
Bredde ytre ring	0 mm
Bredde indre ring	0 mm
Type 2	0
Type 5	0
Bordiameter	18.5 mm
Bortype	DFR

Borelengde	3XD
Diameter	0 mm
Neseradius	0 mm
Lengde	0 mm
D5	41.9000
Pakke Størrelse	1
Beskrivelse	DRILL BODY DIAMETER=18.5-19.5 3XD
[D] Shank Diameter	25.0000
[L3] Brukende lengde	67.0000
LS	45.000,45.0000
LATTH	83.8820
D1 Maks	19.5000
[L] Total Lengde	129.9470
Skraft Type	Whistle Notch 2 CylindricalEnd
Platform	Drill Fix
[D1] Diameter	18.5000
L4 Maks	55.5000
Varekode	DFR185R3WD25M
L2	45.0000
L1	84.9470
Maks omd.	B-Parallelogram 82
L5	0.6180

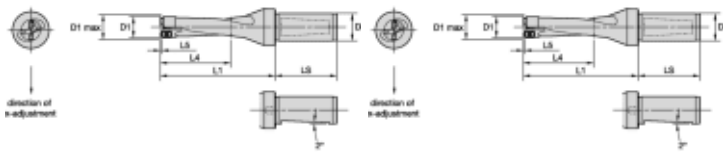

Les mer om produktet her:

<https://www.ail.no/product?number=2498751>