UCDE2500A5ARAKC643M

Produktnummer: 3524455


UCDE2500A5ARAKC643M

Harvi II. UCDE. Unequal Flute Spacing
• Single tool for both roughing and finishing operations for fewer setups.
• Unequal flute spacing minimizes chatter for smoother machining.
• Ramping up to 3°.
• Kennametal standard dimensions.
• Non-center cutting.
• Five-flute geometry enables slotting up to 1 x D.

KennametalSpesifikasjoner

[D] Shank Diameter	25.0000
ISO Catalog Number	UCDE2500A5ARA
Grade	KC643M
Number of Flutes	5
Adapter Style Machine Side	Straight-Cylindrical
[R] Corner Radius	0.75
[L3] Maximum Depth End Mill	45
[L] Overall Length	121
[D1] Effective Cutting Dia	25
[D] Adapter Shank Bore Dia	25
[AP1MAX] 1st Max Cut Depth	45
Vekt	0.723 kg
Bredde/tykkelse	0 mm
Høyde	0 mm
Volum	0.1 liter
Dimensjon	0
Nøkkelvidde	0 mm
Form	RADIE
kW	0

Tanning	5
Innvendig diameter	0 mm
Utvendig diameter	0 mm
Type	STANDARD FRES
Type 4	0
Lengde X dia	2XD
Delelengde	0 mm
Type 3	0
Serie	HARVI II
Kvalitet	KC643M
Bredde ytre ring	0 mm
Bredde indre ring	0 mm
Type 2	0
Type 5	0
Bordiameter	0 mm
Diameter	25 mm
Neseradius	0.75 mm
Arbeidsmateriale	Stål, Rustfritt stål, Støpejern, Superlegering, Herdet stål
Lengde	45 mm

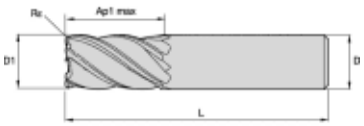

Les mer om produktet her:
https://www.ail.no/product?number=3524455