

# UDDE2500A5ARD KC643M

Produktnummer: 3524539

UDDE2500A5ARDKC643M

Harvi II. UDDE. Unequal Flute Spacing. With neck.


- Kennametal standard dimensions.
- Non-center cutting.
- Ramping up to 3°.
- Optimized geometry for titanium machining.
- Unequal flute spacing minimizes chatter for smoother machining.
- Single tool for both roughing and finishing operations requiring fewer setups.
- Five-flute geometry enables slotting up to 1 x D.



## Spesifikasjoner Kennametal

Vekt	0.0078 kg
Bredde/tykkelse	0 mm
Høyde	0 mm
Volum	0.001 liter
Dimensjon	0
Nøkkelvidde	0 mm
Form	RADIE
kW	0
Tanning	5
Innvendig diameter	0 mm
Utvendig diameter	0 mm
Type	NEDSLIPT FRES
Type 4	0
Lengde X dia	3XD
Delelengde	0 mm
Type 3	0
Serie	HARVI II
Kvalitet	KC643M
Bredde ytre ring	0 mm

Bredde indre ring	0 mm
Type 2	0
Type 5	0
Bordiameter	0 mm
Diameter	25 mm
Neseradius	3 mm
Arbeidsmateriale	Stål, Rustfritt stål, Støpejern, Superlegering, Herdet stål
Lengde	75 mm
Kvalitet	KC643M
Hjørnetype	Radius
D1	25.0000
Pakke Størrelse	1
Beskrivelse	CARBIDE ENDMILL UDDE 25MMX45MM R=3
[D] Shank Diameter	25.0000
[L3] Brukende lengde	75.0000
LS	60.0000
[L] Total Lengde	135.0000
Skaft Type	Straight-Cylindrical
Skaft Type	PLAIN
[Re] Radius	3.0000
Ap1 Maks	45.0000
Material Andre Grupper	Steel
Platform	HARVI II
Material Hoved Grupper	Cast Iron,High-Temp Alloys,Hardened Materials
[D1] Diameter	25.0000
[D3] Nakke Diameter	23.5000
Varekode	UDDE2500A5ARD
L2	135.0000,57.0000

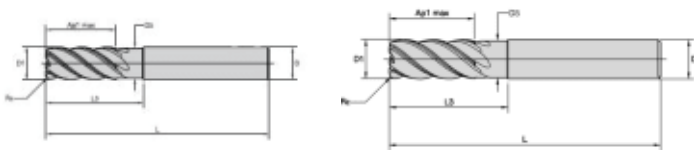



Les mer om produktet her:

<https://www.ail.no/product?number=3524539>