UDDE1600A5ARBKC643M

Produktnummer: 3524525

UDDE1600A5ARBKC643M


Harvi II. UDDE. Unequal Flute Spacing. With neck.
• Kennametal standard dimensions.
• Non-center cutting.
• Ramping up to 3°.
• Optimized geometry for titanium machining.
• Unequal flute spacing minimizes chatter for smoother machining.
• Single tool for both roughing and finishing operations requiring fewer setups.
• Five-flute geometry enables slotting up to 1 x D.



KennametalSpesifikasjoner

ISO Catalog Number	UDDE1600A5ARB
Grade	KC643M
[D3] Neck Diameter	15.04
Number of Flutes	5
Adapter Style Machine Side	Straight-Cylindrical
[R] Corner Radius	1
[L3] Maximum Depth End Mill	48
[L] Overall Length	100
[D1] Effective Cutting Dia	16
[D] Adapter Shank Bore Dia	16
[AP1MAX] 1st Max Cut Depth	32
Vekt	0.25 kg
Bredde/tykkelse	0 mm
Høyde	0 mm
Volum	0.05 liter
Dimensjon	0
Nøkkelvidde	0 mm
Form	RADIE
kW	0

Tanning	5
Innvendig diameter	0 mm
Utvendig diameter	0 mm
Type	NEDSLIPT FRES
Type 4	0
Lengde X dia	3XD
Delelengde	0 mm
Type 3	0
Serie	HARVI II
Kvalitet	KC643M
Bredde ytre ring	0 mm
Bredde indre ring	0 mm
Type 2	0
Type 5	0
Bordiameter	0 mm
Diameter	16 mm
Neseradius	1 mm
Arbeidsmateriale	Stål, Rustfritt stål, Støpejern, Superlegering, Herdet stål
Lengde	32 mm

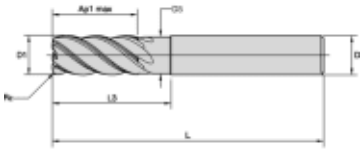

Les mer om produktet her:
https://www.ail.no/product?number=3524525