F4AS1600AWX38R100KCPM15

Produktnummer: 4046423

F4AS1600AWX38R100KCPM15


Harvi I. UBDE. F4AS..WM-WX-WL. Unequal Flute Spacing. With Neck.
• Kennametal standard dimensions.
• Centre cutting.
• Unequal flute spacing minimises chatter for smoother machining.
• Single tool for both roughing and finishing operations requiring fewer setups.



SpesifikasjonerKennametal

Vekt	0.29 kg
Bredde/tykkelse	0 mm
Høyde	0 mm
Volum	0.05 liter
Dimensjon	0
Nøkkelvidde	0 mm
Form	RADIE
kW	0
Tanning	4
Innvendig diameter	0 mm
Utvendig diameter	0 mm
Type	NEDSLIPT FRES
Type 4	0
Lengde X dia	3XD
Delelengde	0 mm
Type 3	0
Serie	HARVI I
Kvalitet	KCPM15
Bredde ytre ring	0 mm

Bredde indre ring	0 mm
Type 2	0
Type 5	0
Bordiameter	0 mm
Diameter	16 mm
Neseradius	1 mm
Arbeidsmateriale	Stål, Rustfritt stål, Støpejern, Herdet stål
Lengde	24 mm
[D] Shank Diameter	16.0000
ISO Catalog Number	F4AS1600AWX38R100
Grade	KCPM15
[D3] Neck Diameter	15.04
Number of Flutes	4
Adapter Style Machine Side	Straight-Cylindrical
[R] Corner Radius	1
[L3] Maximum Depth End Mill	48
[L] Overall Length	100
[D1] Effective Cutting Dia	16
[D] Adapter Shank Bore Dia	16
[AP1MAX] 1st Max Cut Depth	24

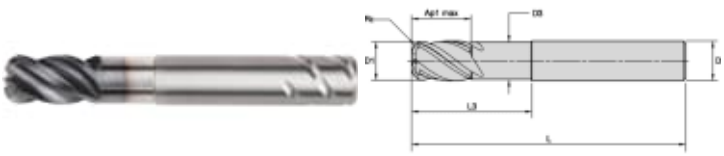

Les mer om produktet her:
https://www.ail.no/product?number=4046423

Utskriftsdato: 17.11.2026